



PLATFORMS AND STAKE BODIES



For the best in quality and durability,
insist on Omaha Standard

America's Standard In Truck Bodies

HEAVY DUTY PLATFORMS

Heavy Duty Platforms

For medium and heavy duty commercial and agricultural uses.

The heavy-duty welded construction, high-grade materials and user friendly design of every Omaha Standard platform insure value and durability for years to come.



SUPER DUTY PLATFORMS

Super Duty Platforms

For the heaviest commercial hauling jobs. These are the most durable platforms you can buy.

Long member heights for Heavy Duty and Super Duty platforms:	
8'6"	through 9'6" = 4"
10'6"	through 12'6" = 6"
14'6"	through 20'6" = 7"
22'6"	through 24'6" = 8"



Omaha Standard reserves the right to modify, change or revise published specifications and furnish products so altered without prior notice.

All Omaha Standard platforms, bulkheads and side assemblies are covered by a 3-year/36,000 mile limited warranty.

PLATFORM DIMENSIONS AND WEIGHTS*

Platform Dimensions	Heavy Duty Platforms				Super Duty Platforms		
	Wood	Smooth Steel	Tread-Plate 1/8"	Tread-Plate 3/16"	Wood	Smooth Steel	Tread-Plate 1/8"
8'6" X 82"	524	695	718	847			
8'6" X 96"	561	751	778	928			
9'6" X 82"	627	839	870	1,038			
9'6" X 96"	671	907	943	1,137			
10'6" X 96"	809	1,058	1,096	1,300			
12'6" X 96"	970	1,272	1,318	1,563	1,586	1,902	1,951
14'6" X 96"	1,257	1,611	1,653	1,951	1,750	2,044	2,005
15'6" X 96"	1,352	1,723	1,781	2,087			
16'6" X 96"	1,429	1,836	1,898	2,224	2,097	2,517	2,582

Platform Dimensions	Heavy Duty Platforms				Super Duty Platforms		
	Wood	Smooth Steel	Tread-Plate 1/8"	Tread-Plate 3/16"	Wood	Smooth Steel	Tread-Plate 1/8"
18'6" X 96"	1,599	2,056	2,126	2,493	2,333	2,802	2,874
20'6" X 96"	1,794	2,280	2,358	2,766	2,569	3,089	3,170
22'6" X 96"	2,039	2,575	2,661	3,110	2,877	3,449	3,537
24'6" X 96"	2,217	2,806	2,900	3,390	3,121	3,745	3,841

*All weights are shown in pounds and are approximate.

For a given steel over wood floor platform add the following weight per body foot of length to weight of same length wood floor platform to arrive at approximate weight:

7 ga. – 60 lbs. ■ 10 ga. – 45 lbs.

1/8" treadplate – 49 lbs. ■ 3/16" treadplate – 70 lbs.

SIDE ASSEMBLIES


Galvanneal Stake Racks

Galvanneal Steel stake racks are available in 28 and 40-inch heights. 15-gauge Galvanneal steel slats are welded to 13-gauge "hat" section roll formed galvanneal steel stakes for outstanding strength and durability. The steel slats feature hemmed edges and rounded corners for safer handling. Sure-close spring tension rack connectors and rack hold downs keep the stake racks solidly in place yet allow for easy one-man removal. Painted with black urethane topcoat over a grey rust-inhibitive primer for a high gloss, durable finish.



Galvanneal Steel Equals Unmatched Corrosion Resistance

Zinc-iron alloy coated galvanneal steel is protected against corrosion two ways. As long as the coating remains unbroken, the alloy shields the base steel from the atmosphere. When the zinc-iron alloy steel is exposed, the coating acts as a galvanic protector, sacrificing itself in the presence of corrosive elements. This combination provides the best protection we have found against corrosion.

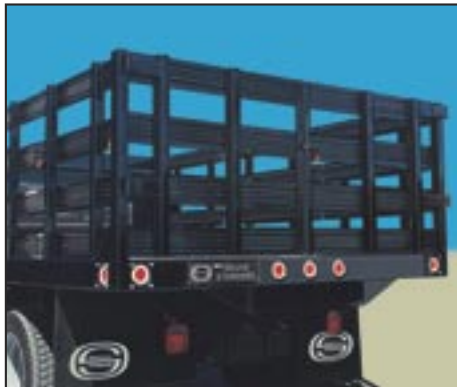

NEW Optional **swing-out rear rack sections** will save you time and effort when loading and unloading. Just swing open instead of lifting the rack sections in and out. All **galvanneal steel** construction including corner posts.



Sure Close Rack Connectors



Rack Hold Downs



Solid Steel Stake Sides

Solid steel stake sides for Heavy Duty Platforms are available in 40-inch and 52-inch heights with two section full opening Econo-Rear Doors. The front and sides are constructed from 14-gauge rollformed steel. Front and side sections are also reinforced with 13-gauge "hat" section stakes on 24-inch centers. Solid sides are ideal for confined cargo or bulk hauling. Painted with black urethane topcoat over a grey rust-inhibitive primer for a high gloss, durable finish.

All Omaha Standard platforms, bulkheads and side assemblies are covered by a 3-year/36,000 mile limited warranty.

Omaha Standard reserves the right to modify, change or revise published specifications and furnish products so altered without prior notice.

RACK SELECTIONS AND WEIGHTS*

PLATFORM DIMENSIONS	14" CONTRACTOR	28" STEEL STAKE RACKS	40" STEEL STAKE RACKS	40" SOLID STEEL SIDES	52" SOLID STEEL SIDES
8'6" X 82"		220	288	—	—
8'6" X 96"		240	313	—	—
9'6" x 82"		259	324	—	—
9'6" x 96"		273	342	520	—
10'6" x 96"	388	281	340	530	—
12'6" X96"	404	315	480	590	880

PLATFORM DIMENSIONS	14" CONTRACTOR	28" STEEL STAKE RACKS	40" STEEL STAKE RACKS	40" SOLID STEEL SIDES	52" SOLID STEEL SIDES
14'6" X 96"	418	—	530	635	965
16'6" X 96"	438	—	583	690	1055
18'6" X 96"	464	—	615	745	1140
20'6" X 96"	480	—	640	780	1225
22'6" X 96"	496	—	665	—	—
24'6" X 96"	—	—	690	—	—

* All weights are shown in pounds and are approximate.

CONTRACTOR BODIES

For hauling equipment and materials to and from the job site the versatility and durability of the Omaha Standard Contractor Body make it your ideal choice. The Contractor gives you considerably more load space and hauling flexibility than a conventional dump body. The Contractor Body features 14-inch reinforced sides and is available in lengths of 8 feet through 18 feet.

Sides are constructed from 12-gauge skin sheet welded to 13-gauge **galvanneal steel** "hat" section stakes. The Contractor features a rugged hinged tailgate constructed from a 12-gauge skin sheet welded to 12-gauge support posts. A three position tailgate and heavy-duty 40-inch **galvanneal steel** bulkhead are standard. Add an Omaha Standard low profile scissor hoist or "Olympic" telescopic hoist and you have the ideal unit to handle all your hauling requirements. Painted with a black urethane topcoat over a grey rust-inhibitive primer for a high gloss, durable finish.



Note: Drop side models are available on Heavy Duty Omaha Standard "Eagle" Dump Bodies.

"STRONG BOX" UNDERBODY TOOLBOXES

Strong and weather resistant with key lockable "T" handle twist lock latches. All **galvanneal steel** construction. Convenient, secure storage for tarps, chains, etc. Available in white primer or with high gloss black urethane top coat. Omaha Standard toolboxes carry a 5-year limited warranty against rust-through or failure of door hinges, latches or lock cylinders.

MODEL	LENGTH	HEIGHT	DEPTH	APPROX. WT.	CAPACITY
U24-P	24"	18"	18"	59 lbs.	4.5 CU. FT.
U24-B	24"	18"	18"	59 lbs.	4.5 CU. FT.
U30-P	30"	18"	18"	74 lbs.	5.6 CU. FT.
U30-B	30"	18"	18"	74 lbs.	5.6 CU. FT.
U36-P	36"	18"	18"	89 lbs.	6.8 CU. FT.
U36-B	36"	18"	18"	89 lbs.	6.8 CU. FT.
U48-P	48"	18"	18"	115 lbs.	9.0 CU. FT.
U48-B	48"	18"	18"	115 lbs.	9.0 CU. FT.
U60-P	60"	18"	18"	143 lbs.	11.3 CU. FT.
U60-B	60"	18"	18"	143 lbs.	11.3 CU. FT.



Omaha Standard reserves the right to modify, change or revise published specifications and furnish products so altered without prior notice.

All Omaha Standard platforms, bulkheads and side assemblies are covered by a 3-year/36,000 mile limited warranty.

BULKHEADS

For Heavy Duty and Super Duty Platforms

40"x96" Heavy Duty Drop-In Bulkhead shown in prime.

Also available in the following sizes: 34"x82", 34"x96", 40"x96", 44"x96", 48"x96", 48"x102", 56"x96" and 56"x102".



Heavy Duty Drop-In Bulkhead

- For Heavy Duty Platforms
- 12-gauge **galvanneal steel** skin sheet with corrugations for added strength. One piece construction for better appearance.
- Skin sheets welded to 13-gauge "hat" section **galvanneal steel** stakes
- 10-gauge side support gussets
- Punched hole window
- Grey rust-inhibitive primer with high gloss black urethane topcoat.

Options: ■ Cab shield
■ No window

Note: Also available with no side gussets.
Recommended for use with stake racks.



40" x 96" Weld-On Knee-Braced Bulkhead shown in prime.

Also available in the following sizes: 34"x96", 40"x102", 44"x96", 44"x102", 48"x96", 48"x102", 56"x96" and "56"x102".

Heavy Duty Weld-On Knee-Braced Bulkhead

- For Heavy Duty Platforms
- 12-gauge **galvanneal steel** skin sheet with punched hole window and formed one-piece construction.
- Inner stakes are 4-inch structural channels welded directly to platform long members.
- Corner posts are gusseted to side rails for added strength.
- Grey rust-inhibitive primer with high gloss black urethane topcoat.
- Full-access design allows material to be loaded flush with the front of the platform.

Options: ■ Cab shield
■ No window



40"x96" Super Duty Weld-On Bulkhead shown in prime.

Also available in the following sizes: 40"x102", 44"x96", 44"x102", 48"x96", 48"x102", 56"x96" and 56"x102".

Super Duty Weld-On Bulkhead

- For Super Duty Platforms
- 12-gauge **galvanneal steel** skin sheet with punched hole window and formed one-piece construction.
- 4-inch structural channel inner and outer stakes for rigid support and strength.
- Grey rust-inhibitive primer with high gloss black enamel topcoat.
- Inner stakes are welded directly to platform long members.

Options: ■ Cab shield
■ No window

All Omaha Standard platforms, bulkheads and side assemblies are covered by a 3-year/36,000 mile limited warranty.

Omaha Standard reserves the right to modify, change or revise published specifications and furnish products so altered without prior notice.

48"x96" Heavy Duty Weld-On "Lumberyard" Bulkhead shown in prime.



Also available in the following sizes: 40"x96", 40"x102", 44"x96", 44"x102", 48"x102", 56"x96" and 56"x102".

Heavy Duty Weld-On "Lumberyard" Bulkhead

- Available for Heavy Duty and Super Duty Platforms.
- 12-gauge **galvanneal steel** skin sheet with punched hole window.
- 3/2 -inch diameter tube welded to the top of bulkhead supports longer lengths of lumber and trusses.
- Heavy 1/2 -inch treadplate steel side gussets welded to platform and bulkhead support heavy loads.
- 1/2 -inch round steel rod welded to edge of treadplate gussets protects cargo from damage.
- 4-inch structural channel inner and outer stakes provide rigid support and strength.
- Inner stakes are welded directly to platform long members.
- Grey rust-inhibitive primer with high gloss black enamel topcoat.

Options: ■ Cab shield
■ No window

CONVERSION HOISTS

Omaha Standard offers 16 different models of quality built hoists with capacities from 5 tons to 40 tons, for bodies from 8 feet to 26 feet. We're the people who set the standard in conversion hoists.

Critical hoist components are fabricated from special high-strength steel. All cylinders are pressure-tested and cycle-tested before installation. Available with gear, piston or electric/hydraulic pumps.

Piston rods and cylinder stages are hard chromed and high polished to insure long cylinder life. A long lasting Omaha Standard hoist combined with an Omaha Standard body offer a total working unit superior to any on the market.



HOIST SPECIFICATIONS				
Model	Body Lengths	CA or CT Truck Dimensions	Capacities (Tons)	Weight (lbs.)
415 DH	8'6" to 12'6"	60" CA to 84" CA	5.2 to 11.6	430
415 SF	8'6" to 12'6"	60" CA to 84" CA	5.2 to 11.6	520
515 DH	8'6" to 14'6"	60" CA to 108" CA	5.2 to 14.2	440
515 SF	8'6" to 14'6"	60" CA to 108" CA	5.2 to 14.2	530
519 DH	8'6" to 14'6"	60" CA to 120" CA	4.8 to 22.9	495
519 SF	8'6" to 14'6"	60" CA to 120" CA	4.8 to 22.9	585
520 DH	8'6" to 16'6"	60" CA to 138" CA	7.6 to 19.9	575
520 SF	8'6" to 16'6"	60" CA to 138" CA	7.6 to 19.9	665
625 DH	14'6" to 18'6"	108" CA to 144" CA	11.2 to 22.6	630
630 DH	12'6" to 18'6"	108" CA to 156" CA	13.1 to 24.6	650
5530DH	16'6" to 20'6"	132" CT to 174" CT	15 to 36	905
Olympic 110	13'6" to 19'6"	120" CA to 150" CA	15 to 21	692
Olympic 128	16'6" to 20'6"	120" CT to 180" CT	18 to 28	857
Olympic 144	18'6" to 22'6"	126" CT to 222" CT	22 to 32	1002
Olympic 144 HD	16'6" to 24'6"	120" to 222" CT	23 to 38	1002
Olympic 180	20'6" to 28'6"	144" to 246" CT	24 to 40	1132

NOTE: All lifting capacity ratings and gross load (body and cargo) are based on proper body, overhang, mounting distance and level load and assume 3" clearance between front of body and back of cab with a rear hinge location 32" behind center line of rear axle for single axle trucks and 44" behind center line of trunnion for tandem axle trucks.

Caution: The combined weights of the truck chassis, hoist, truck body, accessories and cargo must not exceed the gross vehicle weight rating (GVWR) of the truck.

NOTE: For hoist applications other than shown in above table, consult the factory.

Omaha Standard hoists are covered by a 3-year/36,000 mile limited warranty. Additionally, the Olympic hoist mainframe carries an extended 7-year limited warranty.

U.S. Patent No. 4,148,528 and No. 4,592,593

The high capacity Olympic Series Hoists remain the standard for torsional stability. They provide remarkable resistance to body twist and upset loads. Specifically designed to counter off-center loads and non-level dumping conditions, the patented Olympic design has proven itself on the job over and over again. There's an Olympic Series hoist to fit any working package you require.

Low Profile Scissor Hoists

U.S. Patent No. 5,074,622

Omaha Standard offers single and twin cylinder scissor hoists that can be mounted on bodies ranging from 8'6" to 20'6".



Low Profile Scissor Hoist

Subframe Scissor Hoists

U.S. Patent No. 5,074,622

Fast and easy to install, these units are ready to attach to the truck frame. The low 6¼ inch mounting heights can be used under bodies with 4 inch high long members.

Ask your dealer about these other quality products from Omaha Standard.

"Omaha" Service Bodies



"Badger" All Purpose Truck Bodies



"Eagle" Dump Bodies and Heavy Duty Contractor Bodies



2401 West Broadway ■ Council Bluffs, Iowa 51501 USA
 Phone 712-328-7444 ■ 800-279-2201 ■ FAX 800-568-7444
 E-mail: os@omahastd.com ■ Website: www.omahastd.com

Omaha Standard reserves the right to modify, change or revise published specifications and furnish products so altered without prior notice.

PSB 1-04L

Sold and Serviced By