




UNDERBODY TOOLBOXES



Built for strength, durability, and corrosion resistance from all A-40 two-sided zinc coated galvanized steel. To keep the interior compartment dry and weather resistant, we've added a drip rail and a full perimeter automotive neoprene bulb door seal. The all stainless steel key lockable automotive rotary paddle latches make these toolboxes a secure, convenient place to store tarps, flares, tools, chains, etc.

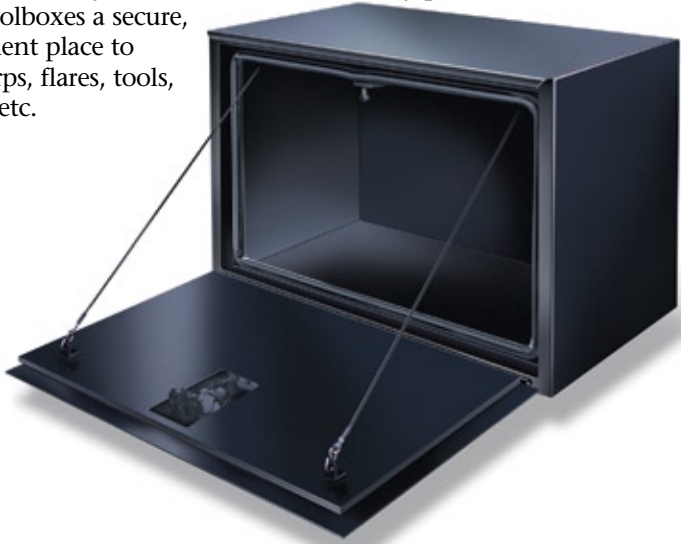

Compartment Construction

- Heavy 14 gauge A-40 two-sided galvanized steel fully welded steel construction
- Full length drip molding

Door Construction

- Double panel doors with interior steel "C" channel stiffener bonded to panels with structural adhesive to eliminate welds.
- Double panel door perimeter is fully bonded with a high strength epoxy to eliminate weld marks.
- Full length all stainless steel hinge with concealed hinge leaves and 1/4" stainless steel pin.
- Door hinges are interior bolted to door frame for security and ease of replacement.
- All stainless steel automotive rotary paddle latch. Bolted to inside of door for ease of replacement.
- Adjustable stainless steel door latch striker pin.
- Door channel design diverts water away from door opening to help keep compartment dry.

- Full perimeter structural adhesive bonded automotive neoprene bulb door seals with no break at latch for full weatherproof integrity.
- Cable door retainers (one door on 24" & 30", two per door on 36", 48" & 60" lengths).

TOOLBOX OPTIONS

- Mounting brackets for attaching toolbox to truck.
- Divider tray kits with adjustable dividers and mounting hardware.
- Custom sizes available.



All Omaha Standard "Underbody Toolboxes" are topcoat e-coated to make them more durable and corrosion resistant giving you more value for your money.

Matches Or Exceeds Truck Manufacturers' Warranties

6 YEAR LIMITED WARRANTY Hinges, Latches and Rust Through	3 YEAR LIMITED WARRANTY All Other Components
--	--

In the interest of product improvement, Omaha Standard Inc. reserves the right to modify, change or revise design and specifications and furnish product so altered without prior notice.

Model	Length	Height	Depth	Clear Door Openings	Approx Weight	Capacity (Cu. Ft.)
U-24	24"	20"	18"	19 ³ / ₄ " x 15 ³ / ₄ "	76 lbs.	4.5 Cu. Ft.
U-30	30"	20"	18"	25 ³ / ₄ " x 15 ³ / ₄ "	92 lbs.	5.6 Cu. Ft.
U-36	36"	20"	18"	31 ³ / ₄ " x 15 ³ / ₄ "	106 lbs.	6.8 Cu. Ft.
U-48	48"	20"	18"	43 ³ / ₄ " x 15 ³ / ₄ "	134 lbs.	9.0 Cu. Ft.
U-60	60"	20"	18"	55 ³ / ₄ " x 15 ³ / ₄ "	164 lbs.	11.2 Cu. Ft.

Ask about these other quality products from Omaha Standard

Service Bodies



"Badger" All Purpose Truck Bodies



Stake Bodies



Solid Steel Stake Bodies



Aluminum "Badger" All Purpose Truck Bodies

The Omaha Standard quality truck equipment line includes e-coated stake bodies, service bodies, platforms, dump bodies, line bodies, contractor bodies, liftgates, grain bodies, and aluminum badger bodies. We also manufacture an outstanding line of low profile scissor and twin telescopic Olympic underbody hoists. Our equipment is sold and serviced by authorized Omaha Standard distributors who make it their business to see that you receive the finest equipment on the market and the best in installation and service.

"Eagle" Dump Bodies and Heavy Duty Contractor Bodies



Line Bodies



Eagle Lift Liftgates



Contractor Bodies



Super Duty Platforms



Heavy Duty Platforms

Twin Telescopic Olympic Underbody Hoists



Low Profile Drop Hinge and Subframe Scissor Hoists



Omaha Standard E-Coat System

If Rust is the Problem... E-Coat is the Solution!

All Omaha Standard products are e-coated to make them more durable and corrosion resistant giving you more value for your money.



3501 South 11th Street ■ Council Bluffs, Iowa 51501 U.S.A.
 Phone 712-328-7444 ■ 800-279-2201 ■ Fax 800-568-7444
 www.omahastd.com ■ e-mail: os@omahastd.com

In the interest of product improvement, Omaha Standard Inc. reserves the right to modify, change or revise design and specifications and furnish product so altered without prior notice.



Sold and Serviced By: